

Pin Extension Spec
Metric Sizes

EJP To Be Extended	KTM PIN EXTENSION CAT NO.	L	Optional Double Lock System	D	A	B	T	H	K Inch Size
				(+0.000)	(+0.127) (-0.000)	(+0.127) (-0.000)	(+0.05) (-0.000)	(+0.020) (-0.254)	
1.2mm	RKTMDINPE012-	L	Opt. DL	12	1.327	3.25	1.5254	18	0.036
1.5mm	RKTMDINPE015-	L	Opt. DL	12	1.627	3.25	1.5254	18	0.036
1.6mm	RKTMDINPE016-	L	Opt. DL	12	1.727	3.25	1.5254	18	0.036
1.7mm	RKTMDINPE017-	L	Opt. DL	12	1.827	3.25	1.5254	18	0.036
1.8mm	RKTMDINPE018-	L	Opt. DL	12	1.927	3.25	1.5254	18	0.036
2mm	RKTMDINPE020-	L	Opt. DL	12	2.127	4.25	2.0254	18	0.051
2.2mm	RKTMDINPE022-	L	Opt. DL	12	2.327	4.25	2.0254	18	0.051
2.4mm	RKTMDINPE024-	L	Opt. DL	12	2.527	5.25	2.0254	18	0.051
2.5mm	RKTMDINPE025-	L	Opt. DL	12	2.627	5.25	2.0254	18	0.051
2.7mm	RKTMDINPE027-	L	Opt. DL	12	2.827	5.25	2.0254	18	0.051
2.9mm	RKTMDINPE029-	L	Opt. DL	12	3.027	5.25	2.0254	18	0.051
3mm	RKTMDINPE030-	L	Opt. DL	12	3.127	6.25	3.0254	18	0.067
3.1mm	RKTMDINPE031-	L	Opt. DL	12	3.227	6.25	3.0254	18	0.067
3.2mm	RKTMDINPE032-	L	Opt. DL	12	3.327	6.25	3.0254	18	0.067
3.4mm	RKTMDINPE034-	L	Opt. DL	12	3.527	6.25	3.0254	18	0.067
3.5mm	RKTMDINPE035-	L	Opt. DL	12	3.627	7.25	3.0254	18	0.067
3.7mm	RKTMDINPE037-	L	Opt. DL	12	3.827	7.25	3.0254	18	0.067
3.9mm	RKTMDINPE039-	L	Opt. DL	12	4.027	7.25	3.0254	18	0.067
4mm	RKTMDINPE040-	L	Opt. DL	16	4.127	8.25	3.0254	22	0.067
4.1mm	RKTMDINPE041-	L	Opt. DL	16	4.227	8.25	3.0254	22	0.067
4.2mm	RKTMDINPE042-	L	Opt. DL	16	4.327	8.25	3.0254	22	0.067
4.4mm	RKTMDINPE044-	L	Opt. DL	16	4.527	8.25	3.0254	22	0.067
4.5mm	RKTMDINPE045-	L	Opt. DL	16	4.627	8.25	3.0254	22	0.067
4.7mm	RKTMDINPE047-	L	Opt. DL	16	4.827	8.25	3.0254	22	0.067
4.9mm	RKTMDINPE049-	L	Opt. DL	16	5.027	8.25	3.0254	22	0.067
5mm	RKTMDINPE050-	L	Opt. DL	16	5.127	10.25	3.0254	22	0.067
5.1mm	RKTMDINPE051-	L	Opt. DL	16	5.227	10.25	3.0254	22	0.067
5.2mm	RKTMDINPE052-	L	Opt. DL	16	5.327	10.25	3.0254	22	0.067
5.4mm	RKTMDINPE054-	L	Opt. DL	16	5.527	10.25	3.0254	22	0.067
5.5mm	RKTMDINPE055-	L	Opt. DL	16	5.627	10.25	3.0254	22	0.067
5.7mm	RKTMDINPE057-	L	Opt. DL	16	5.827	10.25	3.0254	22	0.067
5.9mm	RKTMDINPE059-	L	Opt. DL	16	6.027	10.25	3.0254	22	0.067
6mm	RKTMDINPE060-	L	Opt. DL	18	6.127	12.25	5.0254	24	0.130
6.1mm	RKTMDINPE061-	L	Opt. DL	18	6.227	12.25	5.0254	24	0.130
6.2mm	RKTMDINPE062-	L	Opt. DL	18	6.327	12.25	5.0254	24	0.130
6.5mm	RKTMDINPE065-	L	Opt. DL	18	6.627	12.25	5.0254	24	0.130
6.7mm	RKTMDINPE067-	L	Opt. DL	18	6.827	12.25	5.0254	24	0.130
6.9mm	RKTMDINPE069-	L	Opt. DL	18	7.027	12.25	5.0254	24	0.130
7mm	RKTMDINPE070-	L	Opt. DL	18	7.127	12.25	5.0254	24	0.130
7.2mm	RKTMDINPE072-	L	Opt. DL	18	7.327	12.25	5.0254	24	0.130
7.8mm	RKTMDINPE078-	L	Opt. DL	18	7.927	12.25	5.0254	24	0.130
8mm	RKTMDINPE080-	L	Opt. DL	20	8.127	14.25	5.0254	26	0.130
8.1mm	RKTMDINPE081-	L	Opt. DL	20	8.227	14.25	5.0254	26	0.130
8.2mm	RKTMDINPE082-	L	Opt. DL	20	8.327	14.25	5.0254	26	0.130
8.4mm	RKTMDINPE084-	L	Opt. DL	20	8.527	14.25	5.0254	26	0.130
8.5mm	RKTMDINPE085-	L	Opt. DL	20	8.627	14.25	5.0254	26	0.130
9mm	RKTMDINPE090-	L	Opt. DL	20	9.127	14.25	5.0254	26	0.130
9.7mm	RKTMDINPE097-	L	Opt. DL	20	9.827	14.25	5.0254	26	0.130
10mm	RKTMDINPE100-	L	Opt. DL	25	10.127	16.25	5.0254	31	0.130
10.1mm	RKTMDINPE101-	L	Opt. DL	25	10.227	16.25	5.0254	31	0.130
10.2mm	RKTMDINPE102-	L	Opt. DL	25	10.327	16.25	5.0254	31	0.130
10.5mm	RKTMDINPE105-	L	Opt. DL	25	10.627	16.25	5.0254	31	0.130
11mm	RKTMDINPE110-	L	Opt. DL	25	11.127	18.25	5.0254	31	0.130
12mm	RKTMDINPE120-	L	Opt. DL	25	12.127	18.25	7.0254	31	0.130
12.2mm	RKTMDINPE122-	L	Opt. DL	25	12.327	18.25	7.0254	31	0.130
12.5mm	RKTMDINPE125-	L	Opt. DL	25	12.627	18.25	7.0254	31	0.130
14mm	RKTMDINPE140-	L	Opt. DL	30	14.127	22.25	7.0254	36	0.130
14.2mm	RKTMDINPE142-	L	Opt. DL	30	14.327	22.25	7.0254	36	0.130
16mm	RKTMDINPE160-	L	Opt. DL	30	16.127	22.25	7.0254	36	0.130
16.2mm	RKTMDINPE162-	L	Opt. DL	30	16.327	22.25	7.0254	36	0.130
18mm	RKTMDINPE180-	L	Opt. DL	32	18.127	24.25	7.0254	38	0.130
20mm	RKTMDINPE200-	L	Opt. DL	34	20.127	26.25	8.0254	40	0.130
25mm	RKTMDINPE250-	L	Opt. DL	40	25.127	32.25	10.0254	46	0.130



Pairing KTM DIN Metric Sleeve Extension

- (R&CB)KTM D INSE03A-
- (R&CB)KTM D INSE03B-
- (R&CB)KTM D INSE03C-
- (R&CB)KTM D INSE04A-
- (R&CB)KTM D INSE04B-
- (R&CB)KTM D INSE04C or KTM D INSE05A
- (R&CB)KTM D INSE05A-
- (R&CB)KTM D INSE05A or KTM D INSE06F
- (R&CB)KTM D INSE05B-
- (R&CB)KTM D INSE06A-
- (R&CB)KTM D INSE06B-
- (R&CB)KTM D INSE06C or KTM D INSE08A
- (R&CB)KTM D INSE06D or KTM D INSE08B
- (R&CB)KTM D INSE06E or KTM D INSE08C
- (R&CB)KTM D INSE06E or KTM D INSE08C
- (R&CB)KTM D INSE08D-
- (R&CB)KTM D INSE08E-
- (R&CB)KTM D INSE08F-
- (R&CB)KTM D INSE10A-
- (R&CB)KTM D INSE10B-
- (R&CB)KTM D INSE10C-
- (R&CB)KTM D INSE12A-
- (R&CB)KTM D INSE12B-
- (R&CB)KTM D INSE12C-
- (R&CB)KTM D INSE14A-
- (R&CB)KTM D INSE14B-
- (R&CB)KTM D INSE14C-
- (R&CB)KTM D INSE14D-
- (R&CB)KTM D INSE16A-
- (R&CB)KTM D INSE16B-
- (R&CB)KTM D INSE18A or KTM D INSE20A
- (R&CB)KTM D INSE20B-
- (R&CB)KTM D INSE22-

KTM CUSTOM DIN METRIC PIN EXTENSIONS

* CUSTOMIZE EXTENSION LENGTH UP TO 30 Inches * ADD DOUBLE LOCK SYSTEM
* ADD COUNTER BORE INSIDE OF SLEEVE EXTENSION FOR PIN EXTENSION

ALL EXTENSIONS & DIMENSIONS CAN BE CUSTOMIZED AND TAILOR MADE TO YOUR SPECIFICATION AND DESIGN NEEDS
KTM Office: (905) 878-3788 Fax: (905) 878-0900 Email: Info@kingstool.com Website: www.kingstool.com

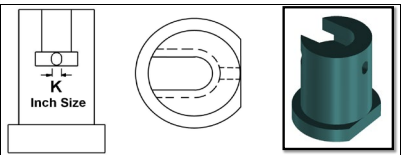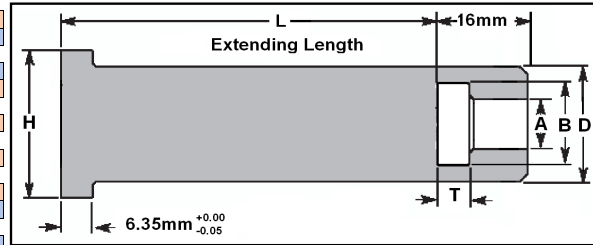

All Extensions can come with an optional Double Locking System.

Slot for Spring Pin to Lock Pin in place.

D Lock on head of extension to lock extension in place.

Locking System can be Customized

Catalog No. [] - [] - [] - []
Optional Locking System []
Indicate Extending Length []

RKTMDINPE ** - L - DL


Sample Ordering Format:

Extending a 7mm Ejector Pin by 170mm
Call Out: RKTMDINPE070 - 170

Extending a 7mm Ejector Pin by 170mm with Double Lock
Call Out: RKTMDINPE070 - 170 - DL

CUSTOM KTM PIN EXTENSION

CUSTOM KTM SLEEVE EXTENSION WITH COUNTER BORE ADDED FOR MAXIMUM EXTENSION COMBINATION

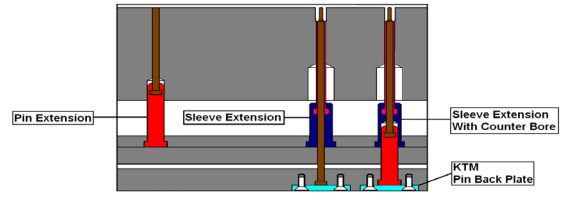

Contact info@kingstool.com For Further Information.

Allow 2 1/2 Weeks for Custom Orders. Rush Delivery Available